

VALVES

760N

ANSI 600


Rating: ANSI 150-600
PN 16-40

PN6, PN420,
ANSI 900-2500
Available
on request

**FLOATING SPLIT BODY FORGED BALL
VALVE REDUCED BORE**
VALVOLA A SFERA FLANGIATA
RICAVATA DAL PIENO A PASSAGGIO RIDOTTO




Dimensions

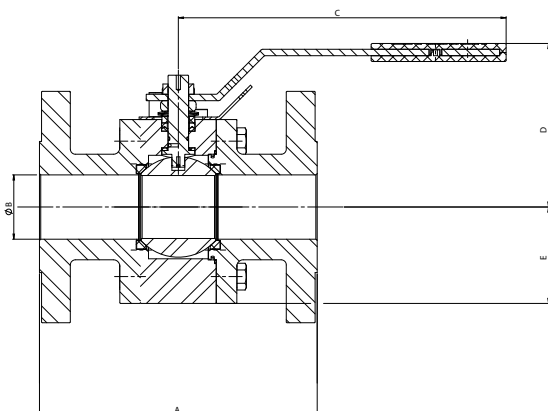

SIZE	2" x 1 1/2"	3" x 2"	4" x 3"	6" x 4"
A RF	292	356	432	558,8
A RTJ	295	359	435	-
A BW	292	356	432	558,8
B	ø38	ø49	ø74	ø100
C	260	333	427	472
D	127	158	174	227
E	82,6	104,8	136,5	177,8
WEIGHT KG.	22	35	73	130

Dimensions in mm

Description & Materials

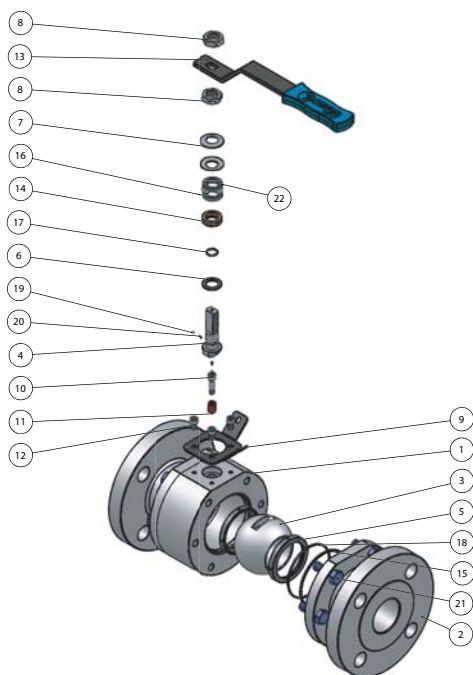

POS	DESCRIPTION	MATERIAL			SPARE PARTS (QTY)
1	BODY	A105	304	316	ON REQUEST
2	CLOSURE	A105	304	316	
3	BALL	304	304	316	
4	STEM	304	304	316	2
5	SEAT	PTFE	PTFE	PTFE	
6	WASHER	PTFE	PTFE	PTFE	1
7	SPRING WASHER	C72	C72	C72	ON REQUEST
8	NUT	6S	6S	6S	ON REQUEST
9	LOCKING DEVICE	FE410	FE410	FE410	ON REQUEST
10	TE SCREW	8,8	8,8	8,8	
11	LEVER STOP	FE410	FE410	FE410	
12	TE SCREW	8,8	8,8	8,8	ON REQUEST
13	ANATOMIC LEVER	GALV. STEEL	GALV. STEEL	GALV. STEEL	
14	CHEVRON	RPTFE	RPTFE	RPTFE	1
15	GASKET	GRAPHITE	GRAPHITE	GRAPHITE	1
16	GASKET	PTFE	PTFE	PTFE	1
17	O-RING	NBR	NBR	NBR	1
18	O-RING	NBR	NBR	NBR	1
19	ANTISTATIC BALL	304	304	316	ON REQUEST
20	ANTISTATIC SPRING	304	304	316	
21	BOLT / NUT	B7/2H	B8M/8M	B8M/8M	
22	WASHER	304	304	304	